



# LODES OUTDOOR

Chelsie 40

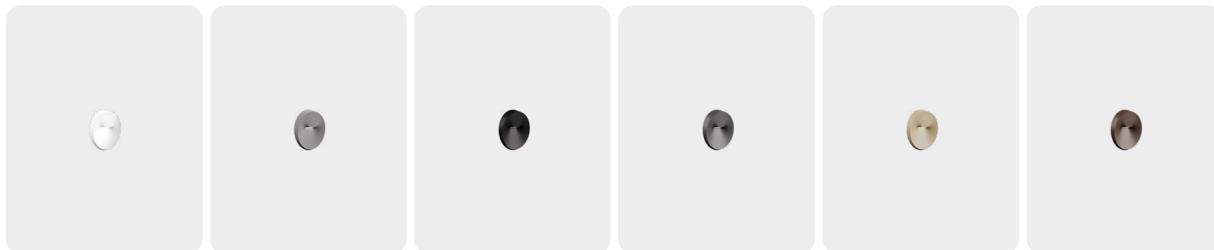



Chelsie 140

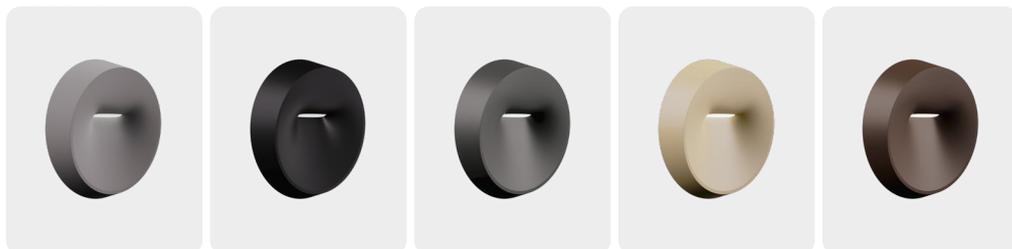



# LODES OUTDOOR

## Chelsie 40

### Dimensions Dimensioni



### Recessed box included Controcassa inclusa



### Recessed cutout



### Category Categoria

### Step Light

Year	2025	
Designer	Patrick Norguet	
Voltage Voltaggio	24 V	
IP67	IK07	Wet Location
  		
Net weight Peso netto	0,10 kg 0,22 lbs	Pack Colli 1


### Light source Sorgente luminosa

**80101**
**24V**
**LED**  
1,2 W

**CRI  $\geq 90$**   
MacAdam < 3-Step

**Cable length 0,5 m**
**Rubber cable**  
Section 2x AWG 20

Remote driver required  
(NOT INCLUDED).  
Driver remoto necessario  
(NON INCLUSO).



### Finish Finitura

**10**
**Matte White**  
Bianco Opaco

**32**
**Matte Grey**  
Grigio Opaco

**20**
**Matte Black**  
Nero Opaco

**44**
**Matte Anthracite**  
Antracite Opaco

**45**
**Matte Champagne**  
Champagne Opaco

**69**
**Natural Brown**  
Testa di Moro

### Colour temperature Temperatura colore

**22**
**2200 K**
**90 lm** Nominal Flux  
**32 lm** Delivered Flux

**27**
**2700 K**
**93 lm** Nominal Flux  
**33 lm** Delivered Flux

**30**
**3000 K**
**95 lm** Nominal Flux  
**34 lm** Delivered Flux

### Recessed box included



Chelsie

Technical info

Chelsie

Technical info

 Lodes, via Pialoi 32,  
30020 Marcon (Venezia) Italy


 info@lodes.com  
lodes.com

# LODES OUTDOOR

## Chelsie 140



### Dimensions Dimensioni

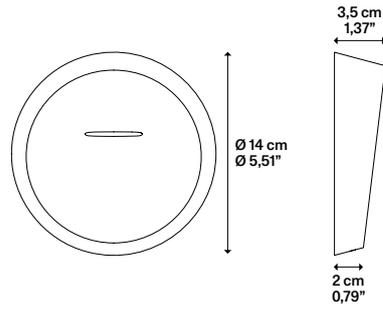

Available for installation on flush-mount boxes with fixing spacing 83,5 mm – 3,28" or 60 mm – 2,36" (standard 503 or 502).

Disponibile per installazione su scatole ad incasso con interasse di fissaggio 83,5 mm – 3,28" o 60 mm – 2,36" (standard 503 o 502).

### Category Categoria

**Floor Washer**

Year		2025
Designer		Patrick Norguet
Voltage Votaggio		24 V
IP67	IK07	Wet Location
  		
Net weight Peso netto	0,40 kg 0,88 lbs	Pack Colli 1

### Light source Sorgente luminosa

**80102**
**24V**
**LED**  
2,3 W

**CRI ≥ 90**  
MacAdam < 3-Step

**Cable length 0,5 m**
**Rubber cable**  
Section 2× AWG 20

Remote driver required  
(NOT INCLUDED).  
Driver remoto necessario  
(NON INCLUSO).



### Finish Finitura

<b>32</b>	<b>20</b>	<b>44</b>	<b>45</b>	<b>69</b>
Matte Grey Grigio Opaco	Matte Black Nero Opaco	Matte Anthracite Antracite Opaco	Matte Champagne Champagne Opaco	Natural Brown Testa di Moro

### Colour temperature Temperatura colore

<b>22</b>	<b>27</b>	<b>30</b>
● 2200 K	● 2700 K	● 3000 K
<u>296 lm</u> Nominal Flux <u>158 lm</u> Delivered Flux	<u>364 lm</u> Nominal Flux <u>194 lm</u> Delivered Flux	<u>375 lm</u> Nominal Flux <u>200 lm</u> Delivered Flux