



LODES OUTDOOR

Chelsie 40

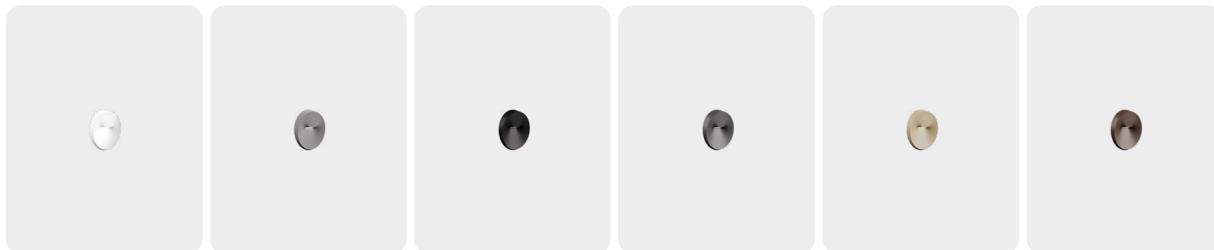



Chelsie 140

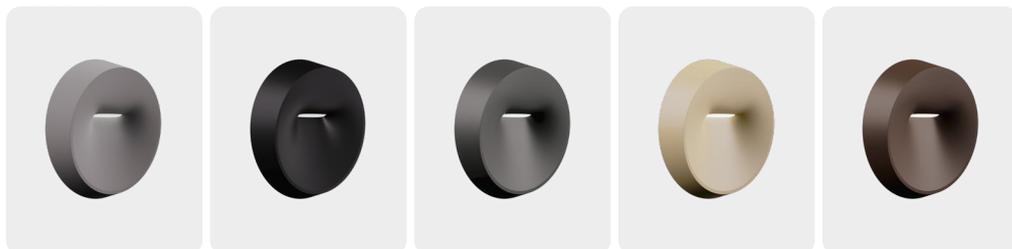




LODES OUTDOOR

Chelsie 40

Dimensions Dimensioni



Recessed box included Controcassa inclusa



Category Categoria

Step Light

Year	2025	
Designer	Patrick Norguet	
Voltage Vtaggio	24 V	
	IP67	IK07
Net weight Peso netto	0,10 kg 0,22 lbs	Pack Colli 1
Energy class Classe energetica	G F	2200 K 2700, 3000 K

Light source Sorgente luminosa

80101 *

24V

 LED
1,2 W

 CRI ≥ 90
MacAdam < 3-Step

Cable length 0,5 m

 Rubber cable
Section 2 × 0,5 mm²

* Remote driver required
(NOT INCLUDED).
Driver remoto necessario
(NON INCLUSO).
► P. 120



Finish Finitura

10

 Matte White
Bianco Opaco

32

 Matte Grey
Grigio Opaco

20

 Matte Black
Nero Opaco

44

 Matte Anthracite
Antracite Opaco

45

 Matte Champagne
Champagne Opaco

69

 Natural Brown
Testa di Moro

Colour temperature Temperatura colore

22

● 2200 K

 90 lm Nominal Flux
32 lm Delivered Flux
27

● 2700 K

 93 lm Nominal Flux
33 lm Delivered Flux
30

● 3000 K

 95 lm Nominal Flux
34 lm Delivered Flux

Recessed box included




LODES OUTDOOR

Chelsie 140



Dimensions Dimensioni

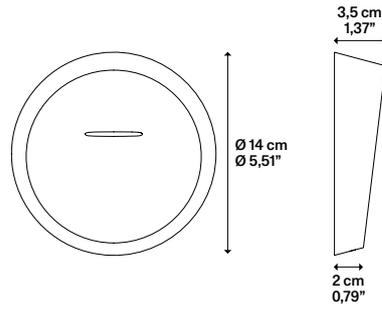

Available for installation on flush-mount boxes with fixing spacing 83,5 mm - 3,28" or 60 mm - 2,36" (standard 503 or 502).

Disponibile per installazione su scatole ad incasso con interasse di fissaggio 83,5 mm - 3,28" o 60 mm - 2,36" (standard 503 o 502).

Category Categoria

Floor Washer

Year	2025										
Designer	Patrick Norguet										
Voltage Voltaggio	24 V 220-240 V										
	IP67	IK07									
Net weight Peso netto	0,40 kg 0,88 lbs	Pack Colli 1									
Energy class Classe energetica	<table border="1"> <tr> <td>24V</td> <td>E</td> <td>2200 K</td> </tr> <tr> <td></td> <td>D</td> <td>2700, 3000 K</td> </tr> <tr> <td>220-240V</td> <td>C</td> <td></td> </tr> </table>	24V	E	2200 K		D	2700, 3000 K	220-240V	C		
24V	E	2200 K									
	D	2700, 3000 K									
220-240V	C										

Light source Sorgente luminosa

80102 *

24V

 LED
2,3 W

 CRI ≥ 90
MacAdam < 3-Step

80103

BUILT-IN DRIVER


 LED
2 W

 CRI ≥ 90
MacAdam < 3-Step

Cable length 0,5 m

 Rubber cable
Section 2 × 0,75 mm²

Cable length 0,5 m

 Rubber cable
Section 3 × 1 mm²


* Remote driver required (NOT INCLUDED).
Driver remoto necessario (NON INCLUSO).
► p. 120

Finish Finitura

32

 Matte Grey
Grigio Opaco

20

 Matte Black
Nero Opaco

44

 Matte Anthracite
Antracite Opaco

45

 Matte Champagne
Champagne Opaco

69

 Natural Brown
Testa di Moro

Colour temperature Temperatura colore

22

● 2200 K

296 lm	Nominal Flux
158 lm	Delivered Flux

27

● 2700 K

364 lm	Nominal Flux
194 lm	Delivered Flux

30

● 3000 K

375 lm	Nominal Flux
200 lm	Delivered Flux