

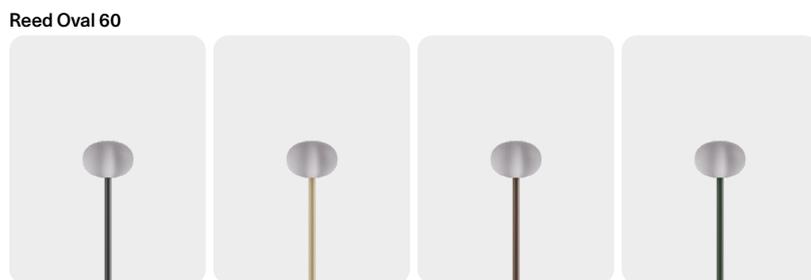


LODES OUTDOOR

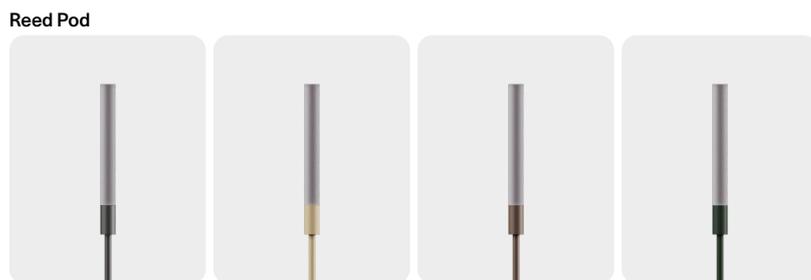


LODES OUTDOOR

Reed 30

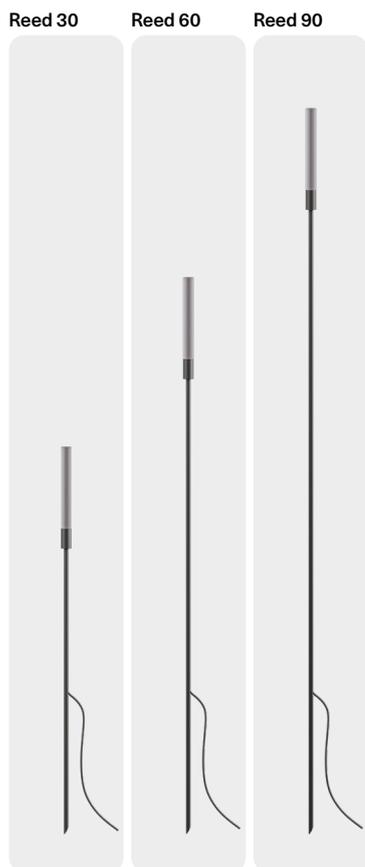


Dimensions
Dimensioni


A



B



C



Category
Categoria

Spike Light

Year		2025
Designer		Lodes
Voltage Voltaggio		24 V
IP67	IK08	Wet Location
		
Net weight Peso netto	A	0.17 kg 0.37 lbs
	B	0.21 kg 0.46 lbs
	C	0.45 kg 0.99 lbs
Pack		2
Colli		

Light source
Sorgente luminosa


80611 24V

LED
0,3 W

CRI ≥ 90
MacAdam < 3-Step


Cable length 1,5 m **Rubber cable**
Section 2× AWG 20

Remote driver required
(NOT INCLUDED).
Driver remoto necessario
(NON INCLUSO).



Finish
Finitura

44



Matte Anthracite
Antracite Opaco

45




Matte Champagne
Champagne Opaco

69



Natural Brown
Testa di Moro

70



Natural Green
Verde Natura

Colour temperature
Temperatura colore

22

● 2200 K

80 lm Nominal Flux
34 lm Delivered Flux

27

● 2700 K

86 lm Nominal Flux
40 lm Delivered Flux

30

● 3000 K

94 lm Nominal Flux
48 lm Delivered Flux

Diffuser
Diffusore

A



Pod

B




Oval 60

C



Oval 90

Reed 60

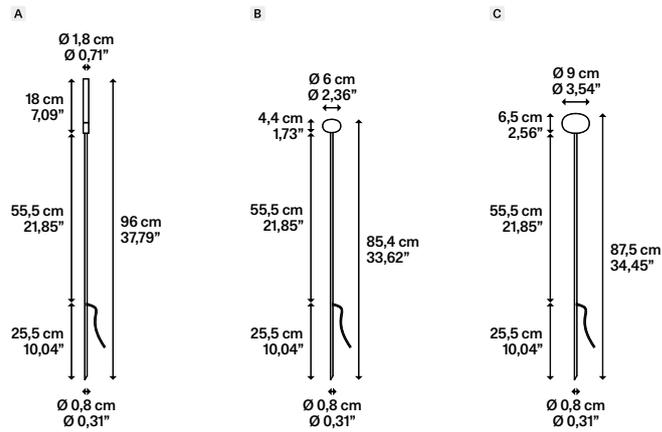Dimensions
DimensioniCategory
Categoria

Spike Light

Year	2025	
Designer	Lodes	
Voltage Voltaggio	24 V	
IP67	IK08	Wet Location
Net weight Peso netto	A 0,20 kg 0,44 lbs B 0,24 kg 0,52 lbs C 0,48 kg 1,05 lbs	Pack Colli 2

Light source
Sorgente luminosa

80612

24V

LED
0,3 WCRI \geq 90
MacAdam < 3-Step

Cable length 1,5 m

Rubber cable
Section 2x AWG 20Remote driver required
(NOT INCLUDED).
Driver remoto necessario
(NON INCLUSO).Finish
Finitura

44

Matte Anthracite
Antracite Opaco

45

Matte Champagne
Champagne Opaco

69

Natural Brown
Testa di Moro

70

Natural Green
Verde NaturaColour temperature
Temperatura colore

22

2200 K

80 lm Nominal Flux
34 lm Delivered Flux

27

2700 K

86 lm Nominal Flux
40 lm Delivered Flux

30

3000 K

94 lm Nominal Flux
48 lm Delivered FluxDiffuser
Diffusore

A



B




C




LODES OUTDOOR

Reed 90

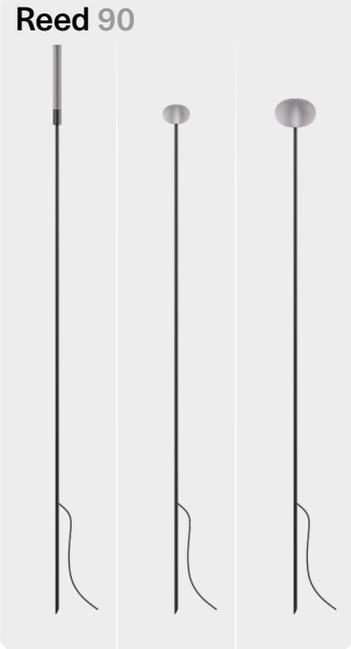


Dimensions Dimensioni


A

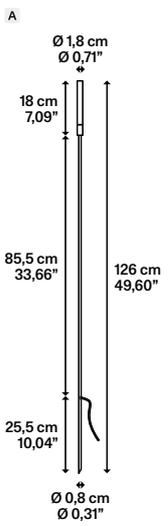

B

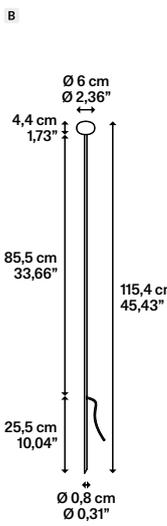

C

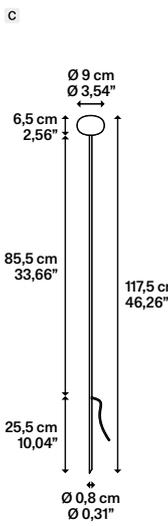

Category Categoria		Spike Light
Year		2025
Designer		Lodes
Voltage Vtaggio		24 V
IP67	IK08	Wet Location
		
Net weight Peso netto	A	Pack Colli 2
	B	
	C	

Light source
Sorgente luminosa

80613

24V

LED
0,3 W

CRI ≥ 90
MacAdam < 3-Step

Cable length 1,5 m

Rubber cable
Section 2× AWG 20

Remote driver required
(NOT INCLUDED).
Driver remoto necessario
(NON INCLUSO).



Finish
Finitura

44

Matte Anthracite
Antracite Opaco

45

Matte Champagne
Champagne Opaco

69

Natural Brown
Testa di Moro

70

Natural Green
Verde Natura

Colour temperature
Temperatura colore

22

● 2200 K

80 lm Nominal Flux
34 lm Delivered Flux

27

● 2700 K

86 lm Nominal Flux
40 lm Delivered Flux

30

● 3000 K

94 lm Nominal Flux
48 lm Delivered Flux

Diffuser
Diffusore

A

Pod

B

Oval 60

C

Oval 90