
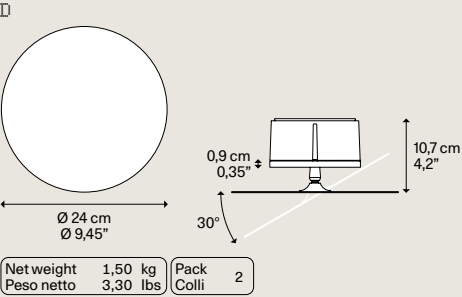
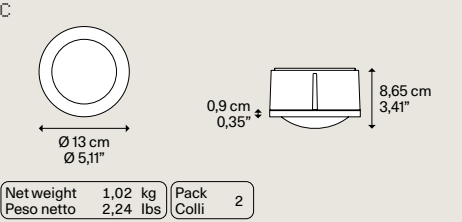


MAP Starting Point TRIAC

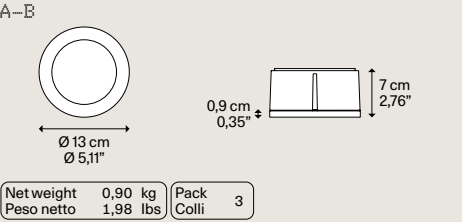

Light source
Sorgente luminosa


LED
Turnable White

7,5
2700 K
3000 K
24 V
CRI 90
MacAdam 3-Step

W
→ 900 lm
→ 918 lm

TRIAC driver integrated included
Driver TRIAC integrato incluso

MAP Connection Point

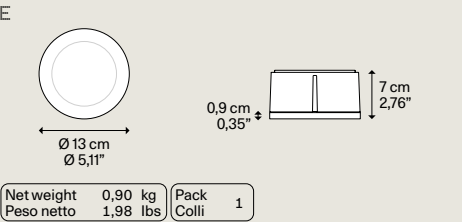

Energy class
Classe energetica C

Description Descrizione	Metal structure Montatura in metallo	Dimming Dimmerazione	Code Codice
Complete the missing field () by entering the code that identifies the type of light and optics/lens.	Matte Black – 9005 Nero Opaco – 9005	TRIAC	22731 2023
Completa il campo mancante () inserendo il codice che identifica la tipologia di luce e di ottica/lente.	Extra Matte Champagne Champagne Extra Opaco		22731 4523
	Natural Brown NSCS8005Y50R Testa di Moro NSCS8005Y50R		22731 6923

Type of light Tipologia di luce	Optics or lens Ottica o lente	Suggested application Applicazione suggerita	Complete code Completa codice
A	25° MEDIUM OPTICS	CEILING LAMP	ME
	MEDIUM OPTICS + HONEYCOMB	CEILING LAMP	MEH
B	55° WIDE OPTICS	CEILING LAMP	EW
	WIDE OPTICS + HONEYCOMB	CEILING LAMP	EWH
C	80° LODES LENS	CEILING LAMP	UW
D	INDIRECT LIGHT	CEILING LAMP WALL LAMP	IL

► Up to 4 Additional Points can be connected to a single Starting Point, for a total of 5 luminaires (1 × Starting Point TRIAC + max. 4 × Additional Points).

► È possibile collegare fino a 4 Additional Points a un unico Starting Point, per un totale di 5 punti luce (1 × Starting Point TRIAC + max. 4 × Additional Points).

Description Descrizione	Metal structure Montatura in metallo	Dimming Dimmerazione	Code Codice
MAP Starting Point blind, without a light source.	Matte Black – 9005 Nero Opaco – 9005	TRIAC	22734 2000
MAP Starting Point cieco, privo di sorgente luminosa.	Matte Champagne Matte Champagne		22734 4500
	Natural Brown NSCS8005Y50R Testa di Moro NSCS8005Y50R		22734 6900

► Up to 5 Additional Points can be connected to a single Connection Point, for a total of 6 units (1 × Connection Point + 5 × Additional Points).


► MAP Connection Point with integrated TRIAC driver.

► È possibile collegare fino a 5 Additional Points a un unico Connection Point, per un totale di 6 elementi (1 × Connection Point + 5 × Additional Points).

► MAP Connection Point con driver TRIAC integrato.

CE IP20 E TRIAC 220-240V E EAC

MAP Starting Point DALI

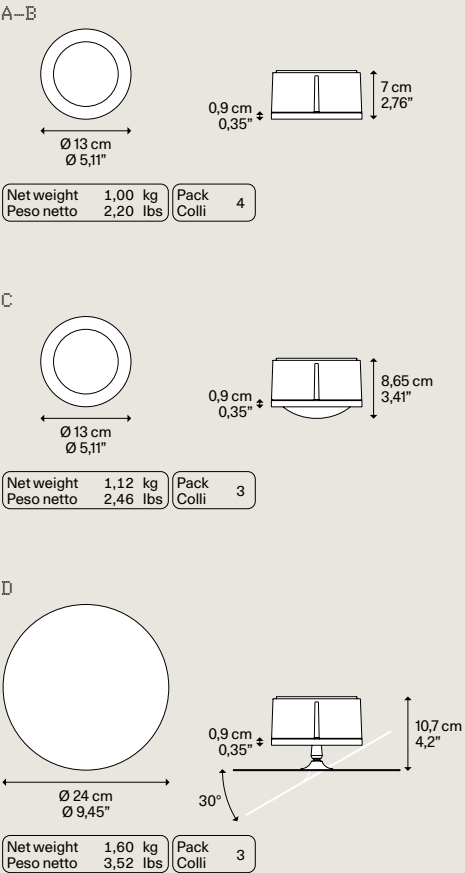

Light source
Sorgente luminosa

LED	7,5	W
Turnable White	2700 K	→ 900 lm
	3000 K	→ 918 lm
DALI/PUSH remote driver included *	24 V	
Driver DALI/PUSH remoto incluso *	CRI 90	
	MacAdam 3-Step	

Energy class
Classe energetica C

Description Descrizione	Metal structure Montatura in metallo	Dimming Dimmerazione	Code Codice
Complete the missing field () by entering the code that identifies the type of light and optics/lens.	Matte Black – 9005 Nero Opaco – 9005		22733 2023
Completa il campo mancante () inserendo il codice che identifica la tipologia di luce e di ottica/lente.	Extra Matte Champagne Champagne Extra Opaco		22733 4523
	Natural Brown NSCS8005Y50R Testa di Moro NSCS8005Y50R		22733 6923

Type of light Tipologia di luce	Optics or lens Ottica o lente	Suggested application Applicazione suggerita	Complete code Completa codice
A	26° MEDIUM OPTICS	CEILING LAMP	ME
	MEDIUM OPTICS + HONEYCOMB	CEILING LAMP	MEH
B	55° WIDE OPTICS	CEILING LAMP	EW
	WIDE OPTICS + HONEYCOMB	CEILING LAMP	EWH
C	80° LODES LENS	CEILING LAMP	UW
D	INDIRECT LIGHT	CEILING LAMP WALL LAMP	IL


► Up to 7 Additional Points can be connected to a single Starting Point, for a total of 8 luminaires (1 × Starting Point DALI + max. 7 × Additional Points).

► È possibile collegare fino a 7 Additional Points a un unico Starting Point, per un totale di 8 punti luce (1 × Starting Point DALI + max. 7 × Additional Points).




* DALI driver included in the packaging, for remote installation.	Dimension Dimensione	Power Potenza	Input voltage Tensione di ingresso	Output voltage Tensione di uscita
* Driver DALI incluso nella confezione, per installazione remota.	176×45×32 mm	60 W	110–240V AC	24V DC


MAP Additional Point

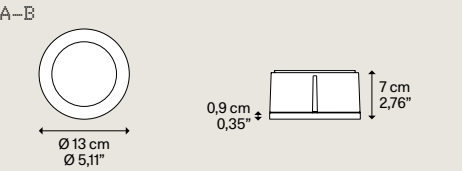

Net weight	0,70	kg	Pack	3
Peso netto	1,54	lbs	Colli	

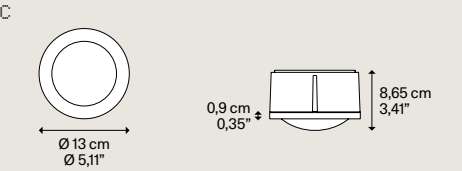

Net weight	0,82	kg	Pack	2
Peso netto	1,80	lbs	Colli	

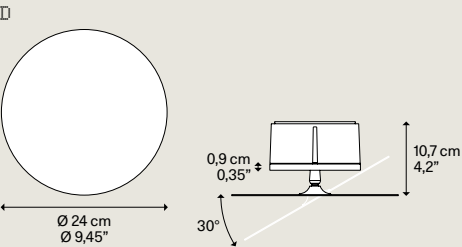

Net weight	1,30	kg	Pack	2
Peso netto	2,86	lbs	Colli	

Light source
Sorgente luminosa

LED	7,5	W
Turnable White	2700 K	→ 900 lm
	3000 K	→ 918 lm
	24 V	
	CRI 90	
	MacAdam 3-Step	

Energy class	C
Classe energetica	

DESIGN GECKELER MICHELS, 2025

Description Descrizione	Metal structure Montatura in metallo	Code Codice
Complete the missing field () by entering the code that identifies the type of light and optics/lens.	Matte Black – 9005 Nero Opaco – 9005	22732 2023
Completa il campo mancante () inserendo il codice che identifica la tipologia di luce e di ottica/lente.	Extra Matte Champagne Champagne Extra Opaco	22732 4523
	Natural Brown NSCS8005Y50R Testa di Moro NSCS8005Y50R	22732 6923


Type of light Tipologia di luce	Optics or lens Ottica o lente	Suggested application Applicazione suggerita	Complete code Completa codice
A	25° MEDIUM OPTICS	CEILING LAMP	ME
	MEDIUM OPTICS + HONEYCOMB	CEILING LAMP	MEH
B	55° WIDE OPTICS	CEILING LAMP	EW
	WIDE OPTICS + HONEYCOMB	CEILING LAMP	EWH
C	80° LODES LENS	CEILING LAMP	UW
D	INDIRECT LIGHT	CEILING LAMP WALL LAMP	IL

► MAP Additional Point operates only when connected to a MAP Starting Point (TRIAC or DALI) or a MAP Connection Point via the MAP Tape.

► MAP Additional Point funziona solo se collegato a un MAP Starting Point (TRIAC o DALI) o a un MAP Connection Point tramite la MAP Tape.



MAP Tape

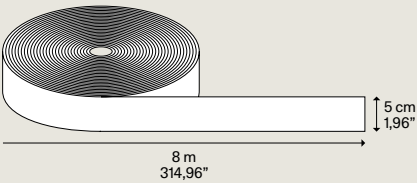

Net weight	0,45 kg	Pack	1
Peso netto	0,99 lbs	Colli	

Description Descrizione	Metal structure Montatura in metallo	Code Codice
MAP Tape: tape in 8 m reels. MAP Tape: nastro in bobine da 8 m.	Matte Black Nero Opaco	22701 20
	Matte Champagne Champagne Opaco	22701 45
	Natural Brown Testa di Moro	22701 69



CATEGORY ACCESSORY

MAP Ceiling Bracket




Net weight	0,02 kg	Pack	1
Peso netto	0,04 lbs	Colli	

Description Descrizione	Metal structure Montatura in metallo	Code Codice
MAP Ceiling Bracket is an accessory to be applied when the tape exceeds 2 metres in length between lighting points. MAP Ceiling Bracket è un accessorio da applicare quando il nastro supera i 2 metri di lunghezza tra un punto luce e l'altro.	Matte Black Nero Opaco	22702 20
	Matte Champagne Champagne Opaco	22702 45
	Natural Brown Testa di Moro	22702 69




MAP Corner Bracket



Net weight	0,20 kg	Pack	1
Peso netto	0,44 lbs	Colli	

Description Descrizione	Metal structure Montatura in metallo	Code Codice
MAP Corner Bracket is the accessory that allows you to create ceiling-to-wall corners while keeping the tape securely in place. MAP Corner Bracket è l'accessorio che permette di realizzare angoli soffitto-parete mantenendo il nastro saldamente in posizione.	Matte Black Nero Opaco	22704 20
	Matte Champagne Champagne Opaco	22704 45
	Natural Brown Testa di Moro	22704 69

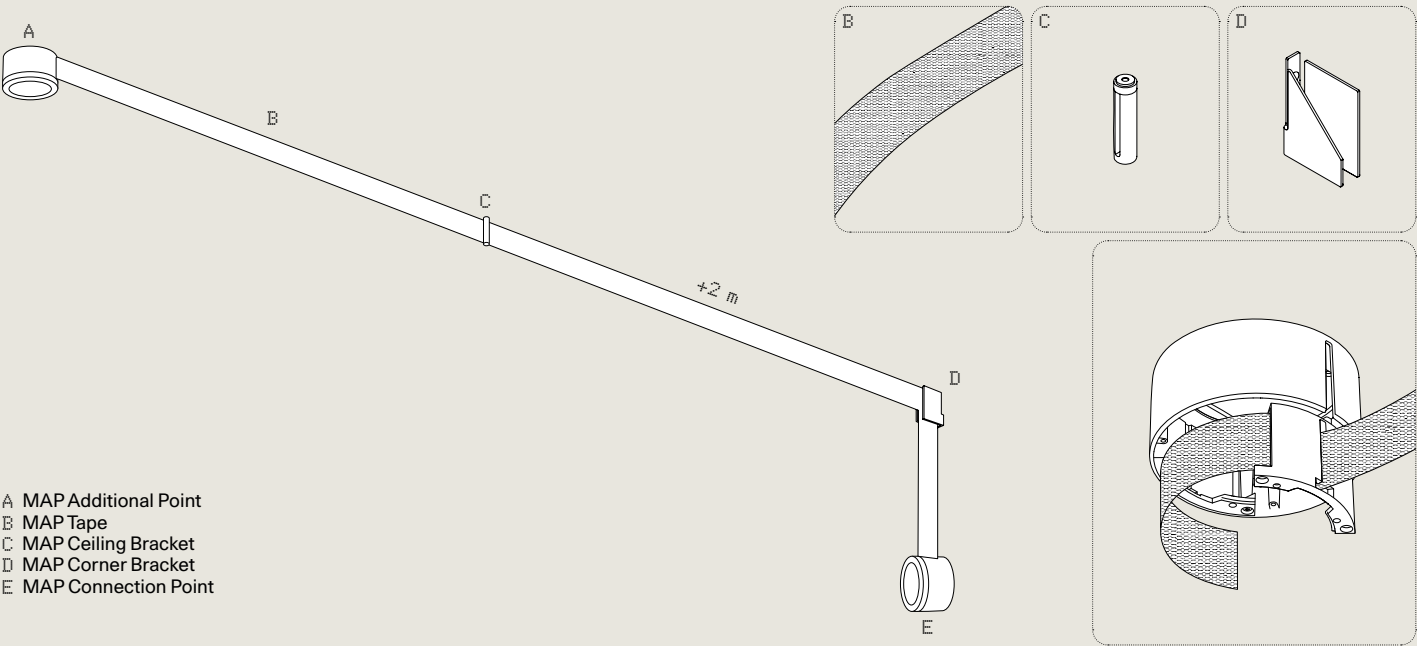

- A MAP Additional Point
- B MAP Tape
- C MAP Ceiling Bracket
- D MAP Corner Bracket
- E MAP Connection Point