



LODES OUTDOOR


Chelsie 40

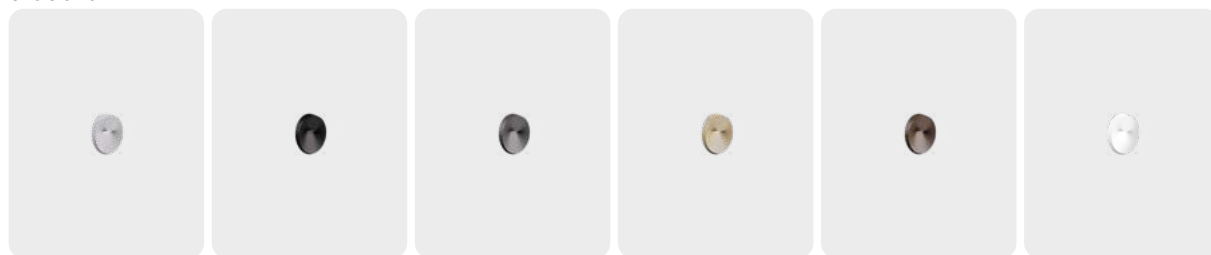

Chelsie 80

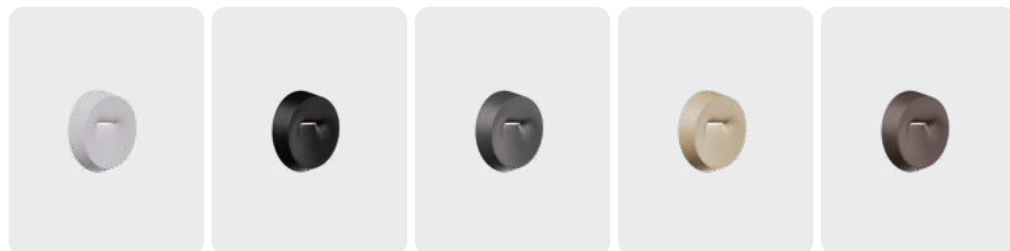

Chelsie 140






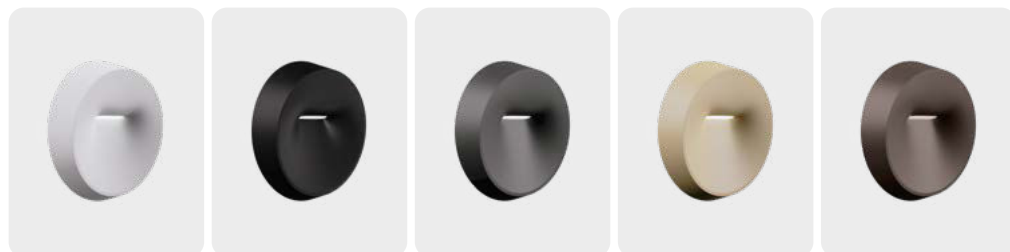


LODES OUTDOOR

Chelsie 40



Dimensions
Dimensioni



Recessed box included
Controcassa inclusa



Category
Categoria

Year 2025	
Designer Patrick Norguet	
Voltage 24 V	
IP65	IK07
  	
Net weight 0.10 kg	Pack 1
Energy class G	
Classe energetica F	2200 K 2700, 3000 K

Step Light

Light source
Sorgente luminosa

80101 *

LED
1,2 W

CRI ≥ 90
MacAdam < 3-Step

24V

Cable length 0,5 m

Rubber cable
Section 2× 0,5 mm²

* Remote driver required
(NOT INCLUDED).
Driver remoto necessario
(NON INCLUSO).

Finish
Finitura

10

Matte White
Bianco Opaco

RAL 9016

32

Matte Grey
Grigio Opaco

RAL 7047

20

Matte Black
Nero Opaco

RAL 9005

44

Matte Anthracite
Antracite Opaco

NCSS 8500N

45

Matte Champagne
Champagne Opaco

69

Natural Brown
Testa di Moro

NCSS 8005 Y50R

Colour temperature
Temperatura colore

22

2200 K

90 lm
32 lm

Nominal Flux
Delivered Flux

27

2700 K

93 lm
33 lm

Nominal Flux
Delivered Flux

30

3000 K

95 lm
34 lm

Nominal Flux
Delivered Flux

Recessed box
Controcassa

80199

**



**



**

Recessed box: Included in
code 80101. Also available
separately in packs of 10
under code 80199.


Controcassa Inclusa nel
cod. 80101, ma ordinabile
anche separatamente in
confezione da 10 pz con il
cod. 80199.

LODES OUTDOOR

Chelsie 80



Dimensions
Dimensioni



Category
Categoria

Step Light

Year	2026	
Designer	Patrick Norguet	
Voltage Vtaggio	24 V	
IP65		IK07
  		
Net weight Peso netto	0,08 kg 0,17 lbs	Pack Colli 1
Energy class Classe energetica	E D	2200 K 2700, 3000 K

Light source
Sorgente luminosa

80104 *

24V

LED
1,2 W

CRI ≥ 90
MacAdam < 3-Step

Cable length 0,5 m

Rubber cable
Section 2× 0,5 mm²

* Remote driver required
(NOT INCLUDED).
Driver remoto necessario
(NON INCLUSO).

Finish
Finitura

32

Matte Grey
Grigio Opaco

RAL 7047

20

Matte Black
Nero Opaco

RAL 9005

44

Matte Anthracite
Antracite Opaco

NCS S 8500N

45

Matte Champagne
Champagne Opaco

69

Natural Brown
Testa di Moro

NCS S 8005 Y50R

Colour temperature
Temperatura colore

22

2200 K

163 lm

87 lm

Nominal Flux

Delivered Flux

27

2700 K

185 lm

99 lm

Nominal Flux

Delivered Flux

30

3000 K

188 lm

100 lm

Nominal Flux


Delivered Flux

LODES OUTDOOR

Chelsie 140



Dimensions
Dimensioni

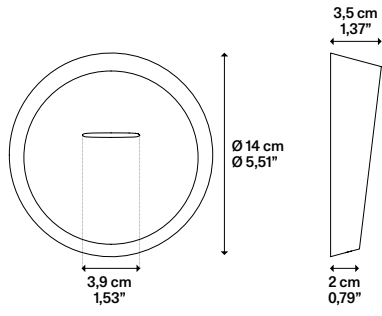

Available for installation on flush-mount boxes with fixing spacing 83,5 mm – 3,28" or 60 mm – 2,36" (standard 503 or 502).

Disponibile per installazione su scatole ad incasso con interasse di fissaggio 83,5 mm – 3,28" o 60 mm – 2,36" (standard 503 o 502).

Category
Categoria

Year	2025									
Designer	Patrick Norguet									
Voltage Voltaggio	24 V 220–240 V									
IP65	IK07									
  										
Net weight Peso netto	0,40 kg 0,88 lbs									
Pack Colli	1									
Energy class Classe energetica	<table><tr><td>24V</td><td>E</td><td>2200 K</td></tr><tr><td></td><td>D</td><td>2700, 3000 K</td></tr><tr><td>220-240V</td><td>C</td><td></td></tr></table>	24V	E	2200 K		D	2700, 3000 K	220-240V	C	
24V	E	2200 K								
	D	2700, 3000 K								
220-240V	C									

Light source
Sorgente luminosa

80102 *	24V	80103	BUILT-IN DRIVER
LED	CRI ≥ 90	LED	CRI ≥ 90
2,3 W	MacAdam < 3-Step	2 W	MacAdam < 3-Step
Cable length 0,5 m	Rubber cable Section 2× 0,75 mm ²	Cable length 0,5 m	Rubber cable Section 3× 1 mm ²
 PWM	 24V	 TRIAC	 220–240V

* Remote driver required (NOT INCLUDED).
Driver remoto necessario (NON INCLUSO).

Finish
Finitura

32	20	44	45	69
Matte Grey Grigio Opaco	Matte Black Nero Opaco	Matte Anthracite Antracite Opaco	Matte Champagne Champagne Opaco	Natural Brown Testa di Moro
RAL 7047	RAL 9005	NCS S 8500N		NCS S 8005 Y50R

Colour temperature
Temperatura colore

22	27	30
2200 K	2700 K	3000 K
296 lm 158 lm	364 lm 194 lm	375 lm 200 lm
Nominal Flux Delivered Flux	Nominal Flux Delivered Flux	Nominal Flux Delivered Flux